



Recommended
Retail Price

BFM[®] Standard Range

Connectors, Caps, Covers and Spigots

Spigots

WELDS TO YOUR PIPES TO ALLOW SNAP-IN FITTING OF BFM® CONNECTORS



- Available in 304L SS and 316L SS.
- The spigot design is slightly tapered, so the OD at the top of the tail is 5mm / $\frac{1}{4}$ " greater than the base
- BFM® spigots are 89mm (3½") in total length - made up of a head of 37mm (1 $\frac{29}{64}$ ") and a 'tail' that is 52mm (2") long

PHYSICAL PROPERTIES:

Material	304L SS or 316L SS
Wall Thickness	Ø100mm: 1.5mm / $\frac{1}{16}$ "
	Ø125mm: 2.0mm / $\frac{1}{8}$ " upwards

Additional sizes are available up to 1,650mm diameter.

DIA:	Ø100mm*		Ø125mm		Ø150mm		Ø200mm		Ø250mm		Ø300mm		Ø350mm		Ø400mm		Ø450mm		Ø500mm		Ø550mm		Ø600mm		Ø650mm	
	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:
304LSS	20000	122	21287	123	20001	126	20002	137	20003	157	20004	177	20005	199	20006	224	20007	243	20008	281	20009	334	20010	366	20011	381
316LSS	20020	193	21288	197	20021	221	20022	244	20023	269	20024	307	20025	352	20026	397	20027	479	20028	500	20029	547	20030	560	20031	568

*Measured externally (OD), all other Ø measured internally (ID).

Note:

- Price quoted above is per spigot - to fit a standard BFM® connector as sealed, flexible connection, you will need two spigots (ie. one top, one bottom).
- The tail of the spigot can be cut to tailor the perfect fit for your available space (refer to our 'Spigot Welding Guidelines' and ensure caution is used when welding not to distort spigot head).
- Ensure the correct Installation Gap (IG - space left between the spigot heads) is known prior to welding - refer to the BFM® IG Calculator App (available on our website or scan code adjacent) or contact your local BFM® Distributor for help.
- We can also supply BFM® Spigots in Hastelloy on request.



The prices shown above indicate our Recommended Retail Prices (RRP). There may be slight price variations in local markets. This price list is based on a NZD/EUR exchange rate of 1 NZD:0.59 EUR. Exchange rates are reviewed at the end of each month. If there is a movement greater than 5% to this rate then the price list will be updated & uploaded by working day 5 of the following month. End of month rates are obtained from <https://www.ird.govt.nz/business-income-tax/overseas-currency-convert-nz.html>

Seeflex 040E

STRONG, RESILIENT, MULTI-PURPOSE CONNECTOR




- Used on all types of stationary, vibratory and gyratory sifters, screeners, feeders, bin discharges, hoppers, conveyors, any packing or product handling equipment.
- Superior wear resistance - used in CIP and washing.

- Maximum Diameter:** 1,650mm
- Maximum Length (≤ Ø650mm):** 6,000mm
- Available with SS Rings?** Yes (≤ Ø500mm)
- Available with Plastic Rings?** Yes (≤ Ø1,000mm)
- Available as TR (Tool Release) option?** Yes (≤ Ø650mm)

PHYSICAL PROPERTIES:

Material	Ether-based thermoplastic polyurethane alloy
Wall Thickness (±10%)	0.9mm / 1/32 inch
Operating Temp Range	-25 to 110°C / -13 to 230°F (surge to 120°C to 248°F)
Surface Resistivity (Ohms)	10 ¹⁰



Additional sizes are available up to 1,650mm diameter.

DIA:	Ø100mm		Ø125mm		Ø150mm		Ø200mm		Ø250mm		Ø300mm		Ø350mm		Ø400mm		Ø450mm		Ø500mm		Ø550mm		Ø600mm		Ø650mm	
LENGTH: (mm)	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:
80	21871	70	22554	79	21756	81	21395	94	21259	107	21969	124	21984	137	22564	167	22566	184	22166	209	22569	215	22573	261	22413	276
100	20050	74	22000	83	20061	85	20072	99	20083	113	20094	130	20105	144	20116	176	20127	194	20138	211	20149	227	20160	275	20171	290
150	20051	77	22001	84	20062	92	20073	103	20084	118	20095	135	20106	151	20117	188	20128	204	20139	212	20150	236	20161	285	20172	302
200	20052	80	22002	89	20063	97	20074	108	20085	124	20096	142	20107	159	20118	193	20129	215	20140	223	20151	249	20162	300	20173	318
250	20053	91	22168	106	20064	111	20075	132	20086	154	20097	173	20108	201	20119	236	20130	272	20141	286	20152	320	20163	375	20174	398
300	20054	97	22247	117	20065	119	20076	143	20087	166	20098	191	20109	218	20120	256	20131	293	20142	306	20153	344	20164	406	20175	432
350	20055	102	22555	126	20066	128	20077	145	20088	194	20099	196	20110	226	20121	282	20132	299	20143	328	20154	350	20165	427	20176	469
400	20056	103	22071	129	20067	127	20078	145	20089	197	20100	197	20111	232	20122	272	20133	314	20144	328	20155	368	20166	429	20177	471
450	20057	113	22556	142	20068	139	20079	167	20090	204	20101	226	20112	250	20123	303	20134	335	20145	365	20156	392	20167	469	20178	500
500	20058	119	22003	144	20069	146	20080	176	20091	229	20102	238	20113	253	20124	319	20135	353	20146	384	20157	413	20168	493	20179	527
550	20059	127	22557	148	20070	151	20081	190	20092	234	20103	249	20114	266	20125	350	20136	395	20147	423	20158	456	20169	542	20180	577
600	20060	132	21386	149	20071	152	20082	191	20093	242	20104	252	20115	274	20126	375	20137	420	20148	454	20159	490	20170	577	20181	606
650	22552	134	22558	153	21385	162	21208	208	21955	243	21742	270	22562	284	22500	378	22567	422	22170	457	22572	495	22577	580	22578	620
700	21278	136	22559	155	21231	171	21569	217	21353	253	22280	271	22563	299	21405	380	22249	423	21262	461	22571	497	22576	582	22579	623
750	22553	137	22560	163	21794	173	21560	219	21691	255	22338	274	23005	325	22252	388	22568	446	22506	465	22570	523	22575	607	22580	642
800	20570	138	21387	174	20571	173	20572	220	20573	256	20574	288	20575	326	20576	392	20577	455	20578	467	20579	540	20580	609	20581	644

The prices shown above indicate our Recommended Retail Prices (RRP). There may be slight price variations in local markets. This price list is based on a NZD/EUR exchange rate of 1 NZD:0.59 EUR. Exchange rates are reviewed at the end of each month. If there is a movement greater than 5% to this rate then the price list will be updated & uploaded by working day 5 of the following month. End of month rates are obtained from <https://www.ird.govt.nz/business-income-tax/overseas-currency-convert-nz.html>

Seeflex 040AS

DESIGNED TO DISSIPATE STATIC, IDEAL FOR POTENTIALLY EXPLOSIVE AREAS



- Transparent, 'anti-static' connector, designed to dissipate static
- Excellent abrasion, chemical and puncture resistance

PHYSICAL PROPERTIES:

Material	Ether-based thermoplastic polyurethane alloy with an anti-static infusion
Wall Thickness (±10%)	0.9mm / 1/32 inch
Operating Temp Range	-25 to 95°C / -13 to 203°F (surge to 100°C to 212°F)
Surface Resistivity (Ohms)	10 ⁸ (very good at dissipating static)

Maximum Diameter:	1,650mm
Maximum Length (≤ Ø650mm):	2,000mm
Available with SS Rings?	Yes (≤ Ø500mm)
Available with Plastic Rings?	Yes (≤ Ø1,000mm)
Available as TR (Tool Release) option?	Yes (≤ Ø650mm)

VIBRATION	OSCILLATION	COMPRESSION	DUST TIGHT	FOOD SAFETY			ATEX

Additional sizes are available up to 1,650mm diameter.

DIA:	Ø100mm		Ø125mm		Ø150mm		Ø200mm		Ø250mm		Ø300mm		Ø350mm		Ø400mm		Ø450mm		Ø500mm		Ø550mm		Ø600mm		Ø650mm	
LENGTH: (mm)	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:
80	70082	87	70098	100	70114	106	70130	120	70146	136	70162	157	70178	175	70194	215	70210	237	70226	274	70242	282	70258	355	70274	361
100	70083	92	70099	105	70115	112	70131	126	70147	144	70163	166	70179	184	70195	227	70211	252	70227	283	70243	296	70259	358	70275	380
150	70084	92	70100	114	70116	124	70132	132	70148	153	70164	177	70180	197	70196	247	70212	274	70228	286	70244	318	70260	382	70276	406
200	70085	99	70101	114	70117	130	70133	137	70149	161	70165	186	70181	208	70197	255	70213	288	70229	301	70245	335	70261	402	70277	427
250	70086	105	70102	124	70118	134	70134	157	70150	186	70166	217	70182	221	70198	288	70214	334	70230	351	70246	394	70262	461	70278	492
300	70087	110	70103	126	70119	141	70135	166	70151	196	70167	229	70183	259	70199	303	70215	351	70231	369	70247	415	70263	485	70279	518
350	70088	115	70104	133	70120	149	70136	169	70152	236	70168	243	70184	269	70200	325	70216	363	70232	399	70248	428	70264	517	70280	553
400	70089	117	70105	154	70121	151	70137	170	70153	241	70169	252	70185	279	70201	326	70217	382	70233	400	70249	451	70265	519	70281	555
450	70090	130	70106	168	70122	168	70138	199	70154	271	70170	275	70186	307	70202	360	70218	403	70234	441	70250	477	70266	567	70282	607
500	70091	137	70107	178	70123	176	70139	210	70155	284	70171	289	70187	317	70203	379	70219	424	70235	464	70251	502	70267	596	70283	638
550	70092	149	70108	182	70124	183	70140	248	70156	299	70172	309	70188	366	70204	423	70220	477	70236	523	70252	565	70268	668	70284	712
600	70093	160	70109	184	70125	185	70141	250	70157	300	70173	313	70189	399	70205	453	70221	515	70237	574	70253	615	70269	711	70285	796
650	70094	161	70110	188	70126	200	70142	254	70158	301	70174	338	70190	405	70206	470	70222	520	70238	577	70254	618	70270	718	70286	770
700	70095	165	70111	192	70127	214	70143	259	70159	307	70175	352	70191	410	70207	475	70223	531	70239	608	70255	632	70271	733	70287	787
750	70096	167	70112	198	70128	219	70144	262	70160	311	70176	363	70192	412	70208	480	70224	542	70240	586	70256	645	70272	741	70288	795
800	70097	167	70113	209	70129	217	70145	263	70161	311	70177	366	70193	414	70209	482	70225	559	70241	588	70257	665	70273	744	70290	798

The prices shown above indicate our Recommended Retail Prices (RRP). There may be slight price variations in local markets. This price list is based on a NZD/EUR exchange rate of 1 NZD:0.59 EUR. Exchange rates are reviewed at the end of each month. If there is a movement greater than 5% to this rate then the price list will be updated & uploaded by working day 5 of the following month. End of month rates are obtained from <https://www.ird.govt.nz/business-income-tax/overseas-currency-convert-nz.html>

Seeflex 020E

LIGHTWEIGHT & FLEXIBLE, IDEAL FOR WEIGHSCALE APPLICATIONS




- Transparent, light weight Seeflex media, specifically designed for load and weigh scale type equipment
- Also very good in applications with vertical movement as it is particularly flexible

PHYSICAL PROPERTIES:

Material	Ether-based thermoplastic polyurethane alloy
Wall Thickness (±10%)	0.35mm / 1/64 inch
Operating Temp Range	-25 to 80°C / -13 to 176°F (surge to 100°C to 212°F)
Surface Resistivity (Ohms)	10 ¹⁰

Maximum Diameter:	1,650mm
Maximum Length (≤ Ø650mm):	6,000mm
Available with SS Rings?	Yes (≤ Ø500mm)
Available with Plastic Rings?	Yes (≤ Ø1,000mm)
Available as TR (Tool Release) option?	Yes (≤ Ø650mm)



Additional sizes are available up to 1,650mm diameter.

DIA:	Ø100mm		Ø125mm		Ø150mm		Ø200mm		Ø250mm		Ø300mm		Ø350mm		Ø400mm		Ø450mm		Ø500mm		Ø550mm		Ø600mm		Ø650mm	
LENGTH: (mm)	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:
80	22155	70	22598	79	22610	81	22615	94	22360	107	21680	124	22622	137	22244	167	22646	184	22156	209	22672	215	22243	261	22699	276
100	20789	74	23000	83	20790	85	20791	99	20792	113	20793	130	21360	144	21361	176	21362	194	21363	211	21364	227	21365	275	21366	290
150	20690	77	23001	84	21222	92	21432	103	21317	118	21787	135	22623	151	22548	188	22647	204	22659	212	22673	236	22686	285	22700	302
200	21849	80	23002	89	21438	97	20692	108	20693	124	20694	142	21207	159	20695	193	20696	215	20697	223	20698	249	20699	300	20703	318
250	22425	91	22599	106	21781	111	21997	132	21613	154	21398	173	22624	201	22635	236	22648	272	22660	286	22674	320	22687	375	22701	398
300	21922	97	22342	117	21195	119	21837	143	21194	166	21384	191	22349	218	22636	256	22649	293	22661	306	22675	344	22688	406	22702	432
350	22590	102	22600	126	21882	128	21838	145	21774	194	21408	196	22625	226	22637	282	22650	299	22662	328	22676	350	22689	427	22703	469
400	22491	103	22601	129	21415	127	21308	145	21307	197	21784	197	22626	232	21806	272	22651	314	22063	328	22677	368	22690	429	22704	471
450	22591	113	22602	142	22492	139	22616	167	22316	204	22620	226	22627	250	22638	303	22652	335	22663	365	22678	392	22691	469	22705	500
500	23004	119	22603	144	22216	146	21303	176	21726	229	21915	238	22628	253	22639	319	22653	353	22664	384	22679	413	22692	493	22706	527
550	22592	127	22604	148	22611	151	21321	190	22445	234	21827	249	22629	266	22640	350	21913	395	22665	423	22680	456	22693	542	22707	577
600	22593	132	22605	149	21941	152	22040	191	22499	242	22621	252	22630	274	22641	375	22654	420	22666	454	22681	490	22694	577	22708	606
650	22594	134	22606	153	21369	162	22336	208	22618	243	21591	270	22631	284	22642	378	22655	422	22667	457	22682	495	22695	580	22709	620
700	22595	136	22607	155	22612	171	22104	217	22619	253	21636	271	22632	299	22643	380	22656	423	22668	461	22683	497	22696	582	22710	623
750	22596	137	22608	163	22613	173	22617	219	22150	255	21624	274	22633	325	22644	388	22657	446	22669	465	22684	523	22697	607	22711	642
800	22597	138	22609	174	22614	173	21714	220	22142	256	21189	288	22634	326	22645	392	22658	455	22670	467	22685	540	22698	609	22712	644

The prices shown above indicate our Recommended Retail Prices (RRP). There may be slight price variations in local markets. This price list is based on a NZD/EUR exchange rate of 1 NZD:0.59 EUR. Exchange rates are reviewed at the end of each month. If there is a movement greater than 5% to this rate then the price list will be updated & uploaded by working day 5 of the following month. End of month rates are obtained from <https://www.ird.govt.nz/business-income-tax/overseas-currency-convert-nz.html>

Seeflex 040E WS (Wash Sleeve)

EASILY IDENTIFIABLE CONNECTOR EXCLUSIVELY FOR CIP PROCESSES




- A standard Seeflex 040E connector with an easily identifiable 'Wash Sleeve' stamp for staff to use specifically in wash cycles only.
- All other physical properties are identical to standard Seeflex 040E Connectors.

Maximum Diameter: 1,650mm
Maximum Length (≤ Ø650mm): 6,000mm

PHYSICAL PROPERTIES:

Material	Ether-based thermoplastic polyurethane alloy
Wall Thickness (±10%)	0.9mm / 1/32 inch
Operating Temp Range	-25 to 110°C / -13 to 230°F (surge to 120°C to 248°F)
Surface Resistivity (Ohms)	10 ¹⁰



Additional sizes are available up to 1,650mm diameter.

DIA:	Ø100mm		Ø125mm		Ø150mm		Ø200mm		Ø250mm		Ø300mm		Ø350mm		Ø400mm		Ø450mm		Ø500mm		Ø550mm		Ø600mm		Ø650mm	
LENGTH: (mm)	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:
80	50204	76	50212	85	50248	87	50258	100	50226	113	50141	130	50266	143	50275	174	50237	190	50283	215	50292	222	50303	267	50314	282
100	70013	80	70014	90	70015	92	70016	105	70017	119	70018	137	70019	151	70020	183	70021	200	70022	217	70023	233	70024	282	70025	296
150	70000	83	70001	91	70002	98	70030	109	50055	124	50073	141	70029	157	50150	195	50171	210	50148	218	50172	242	50068	291	50069	308
200	70026	86	50213	95	70057	104	70003	114	70004	130	70005	149	70006	165	70007	199	70008	221	70009	230	70010	255	70011	306	70012	324
250	70059	97	50214	112	50249	117	50134	139	50067	161	50056	180	22294	208	50057	242	50238	279	50284	292	50293	326	50304	381	50315	405
300	50106	104	50215	124	22344	126	70031	149	50071	173	22281	197	50107	224	50092	262	50108	299	70065	313	50109	350	50110	412	50111	438
350	22323	114	50216	132	50250	132	70060	151	50159	200	50230	202	70027	232	50276	276	50239	305	50285	334	50294	356	50305	433	50316	475
400	50205	109	50217	136	22401	134	50200	151	50227	203	50028	203	70066	238	50076	278	50114	321	50115	335	50116	375	50117	435	50118	477
450	50206	120	50218	149	50251	145	50259	174	50228	210	70028	232	50267	256	50277	309	50240	341	50343	371	50295	398	50306	475	50317	507
500	50207	126	50219	156	50252	153	50133	183	22456	235	50231	245	50268	259	50149	325	50241	359	50287	390	50296	419	50307	500	50318	533
550	50208	134	50220	152	50253	158	50260	205	22248	240	50232	263	50269	272	50278	356	50242	402	50286	429	50297	462	50308	548	50319	583
600	50054	138	50221	155	50254	159	50261	198	22455	246	50233	258	50270	281	50279	381	50243	418	50288	460	50298	496	50309	571	50320	613
650	50209	140	50222	160	50255	168	50262	214	22454	249	50234	274	50271	291	22362	384	50244	426	70063	463	50299	501	50310	586	50321	626
700	50210	142	50223	161	50256	177	50263	223	22017	260	22361	277	50272	305	50280	386	50245	430	50289	487	50300	503	50311	588	50322	629
750	22437	143	50224	169	22400	179	50264	225	22333	261	50235	280	50273	328	50281	394	50246	452	50290	472	50301	530	50312	613	50323	649
800	50211	144	50225	181	50257	180	50265	226	50229	262	50236	294	50274	332	50282	399	50247	461	50291	473	50302	547	50313	615	50324	651

The prices shown above indicate our Recommended Retail Prices (RRP). There may be slight price variations in local markets. This price list is based on a NZD/EUR exchange rate of 1 NZD:0.59 EUR. Exchange rates are reviewed at the end of each month. If there is a movement greater than 5% to this rate then the price list will be updated & uploaded by working day 5 of the following month. End of month rates are obtained from <https://www.ird.govt.nz/business-income-tax/overseas-currency-convert-nz.html>

Seeflex 040E TR (Tool Release) FIRMER BAND FOR SECURITY - REQUIRES SPECIAL 'TR' TOOL TO REMOVE




- Firmer 'TR' connector cuff requires special 'TR Tool' to remove connector
- Reduces risk of staff putting their hands near dangerous moving parts to release manually
- *CAUTION: Although the firmer TR band is a significant deterrent to manual removal, if an individual is determined enough, it may still be possible.*

Maximum Diameter:	650mm
Maximum Length (≤ Ø650mm):	6,000mm
Available with SS Rings?	Yes (≤ Ø500mm)
Available with Plastic Rings?	Yes (≤ Ø1,000mm)

PHYSICAL PROPERTIES:

Material	Ether-based thermoplastic polyurethane alloy
Wall Thickness (±10%)	0.9mm / 1/32 inch
Operating Temp Range	-25 to 110°C / -13 to 230°F (surge to 120°C to 248°F)
Surface Resistivity (Ohms)	10 ¹⁰



DIA:	Ø100mm		Ø125mm		Ø150mm		Ø200mm		Ø250mm		Ø300mm		Ø350mm		Ø400mm		Ø450mm		Ø500mm		Ø550mm		Ø600mm		Ø650mm	
LENGTH: (mm)	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:
100	25292	90	26442	99	21483	103	20311	120	21596	136	23003	156	21526	173	21925	208	21644	257	22409	284	22410	294	22396	346	22411	365
150	21310	92	21332	101	21280	109	21697	126	22415	142	21998	163	21811	181	22416	220	23011	269	21815	279	23012	307	22220	360	23013	381
200	25382	95	25552	105	24504	115	21238	129	21225	146	21239	168	21241	187	21242	225	21243	277	21244	287	21245	316	21246	371	21247	392

To calculate the cost of a TR version of a connector with a different diameter and length or material, simply add the following surcharge to the price shown in this pricelist:

Surcharge on standard RRP price:	13	13	15	18	19	21	24	27	52	53	56	59	62
---	----	----	----	----	----	----	----	----	----	----	----	----	----

To remove the TR Connectors, a special rounded-end BFM® 'TR Tool' is required - these are available to purchase from your local BFM® Distributor.



The prices shown above indicate our Recommended Retail Prices (RRP). There may be slight price variations in local markets. This price list is based on a NZD/EUR exchange rate of 1 NZD:0.59 EUR. Exchange rates are reviewed at the end of each month. If there is a movement greater than 5% to this rate then the price list will be updated & uploaded by working day 5 of the following month. End of month rates are obtained from <https://www.ird.govt.nz/business-income-tax/overseas-currency-convert-nz.html>

LM4

100% WOVEN POLYESTER - SUITABLE FOR HIGHER TEMPERATURES




- Used for higher temperature environments (up to 130°C /266°F).
- Ideal for use where air needs to be vented through the walls of the flexible connector.

PHYSICAL PROPERTIES:

Material	100% woven polyester fibre
Weight (±10%)	393g/m ² / 11.6oz/yd ²
Max. Operating Temp	130°C / 266°F (surge to 150°C /302°F)

Maximum Diameter:	1,650mm
Maximum Length (≤ Ø650mm):	1,500mm
Available with SS Rings?	Yes (≤ Ø500mm)
Available with Plastic Rings?	Yes (≤ Ø1,000mm)
Available as TR (Tool Release) option?	Yes (≤ Ø650mm)



Additional sizes are available up to 1,650mm diameter.

DIA:	Ø100mm		Ø125mm		Ø150mm		Ø200mm		Ø250mm		Ø300mm		Ø350mm		Ø400mm		Ø450mm		Ø500mm		Ø550mm		Ø600mm		Ø650mm	
LENGTH: (mm)	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:
100	20900	64	51000	67	20901	70	20902	78	20903	85	20904	91	20905	102	20906	110	20907	122	20908	141	20909	151	20910	161	20911	169
150	20509	65	51001	68	19569	70	50009	79	50014	86	50015	95	50406	103	22089	112	50424	123	50425	144	50426	152	50427	162	50428	172
200	-	-	-	-	-	-	19399	80	20510	88	20511	100	20512	106	20483	118	20513	127	20514	147	20515	157	20516	167	20517	178



The prices shown above indicate our Recommended Retail Prices (RRP). There may be slight price variations in local markets. This price list is based on a NZD/EUR exchange rate of 1 NZD:0.59 EUR. Exchange rates are reviewed at the end of each month. If there is a movement greater than 5% to this rate then the price list will be updated & uploaded by working day 5 of the following month. End of month rates are obtained from <https://www.ird.govt.nz/business-income-tax/overseas-currency-convert-nz.html>

Blanking Cap (Seeflex 040E)

PREVENTS CONTAMINATION/USED AS SIGHT-GLASSES




- Used to prevent contamination during clean down or change-over.
- They protect products and prevent dust emission into the factory.
- Ideal as sight-glasses for sifters.

Maximum Diameter: 1,650mm
Available as TR (Tool Release) option? Yes



PHYSICAL PROPERTIES:

Material	Ether-based thermoplastic polyurethane alloy
Wall Thickness (±10%)	0.9mm / 1/32 inch
Operating Temp Range	-25 to 110°C / -13 to 230°F (surge to 120°C to 248°F)
Height	30mm



Additional sizes are available up to 1,650mm diameter.

DIA:	Ø100mm		Ø125mm		Ø150mm		Ø200mm		Ø250mm		Ø300mm		Ø350mm		Ø400mm		Ø450mm		Ø500mm		Ø550mm		Ø600mm		Ø650mm	
	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:
	20750	73	20761	76	20751	78	20752	85	20709	92	20753	104	20754	121	20755	143	20756	154	20757	186	20758	230	20759	249	20760	262

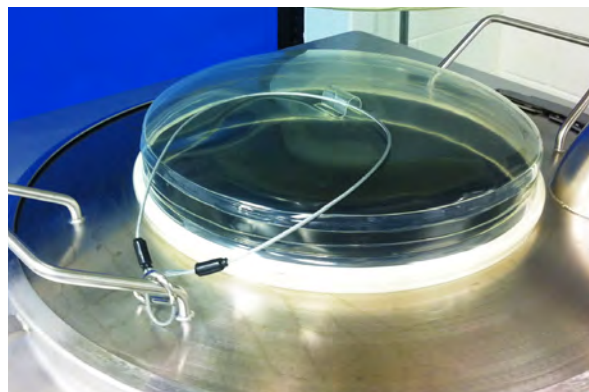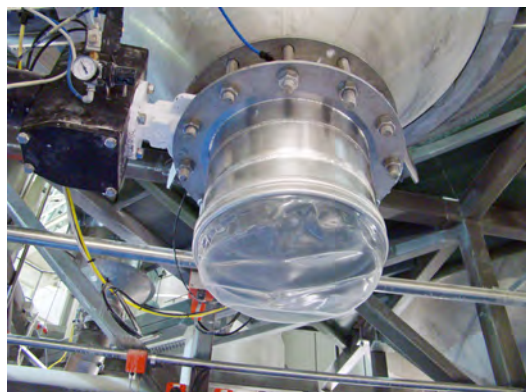

The prices shown above indicate our Recommended Retail Prices (RRP). There may be slight price variations in local markets. This price list is based on a NZD/EUR exchange rate of 1 NZD:0.59 EUR. Exchange rates are reviewed at the end of each month. If there is a movement greater than 5% to this rate then the price list will be updated & uploaded by working day 5 of the following month. End of month rates are obtained from <https://www.ird.govt.nz/business-income-tax/overseas-currency-convert-nz.html>

Teflex NP (Non-Permeable)

PTFE LAMINATE FOR HIGH TEMPERATURE & CHEMICALS



- Non-permeable and can be used on products across the full pH scale, ie. caustic or acid products will not effect Teflex NP
- Capable of running at high temperatures
- Designed to dissipate electrical charge - 10⁶

PHYSICAL PROPERTIES:

Material	Pure PTFE
Weight (±10%)	459g/m ² / 13.5oz/yd ²
Max. Operating Temp	300°C / 572°F (surge to 316°C / 600°F)
Surface Resistivity (Ohms)	10 ⁶

Maximum Diameter:	450mm
Maximum Length:	1,000mm
Available with SS Rings?	No
Available with Plastic Rings?	No
Available as TR (Tool Release) option?	Yes

VIBRATION	OSCILLATION	COMPRESSION	DUST TIGHT	FOOD SAFETY		ATEX

DIA:	Ø150mm		Ø200mm		Ø250mm		Ø300mm	
LENGTH: (mm)	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:
100	29093	287	29041	382	29043	453	29042	512
150	29106	315	29124	394	29133	467	29087	526
200	29108	328	28819	402	29135	476	28718	554
250	29127	385	29071	541	29137	638	29147	722
300	29129	427	29078	569	29144	672	29080	792



The prices shown above indicate our Recommended Retail Prices (RRP). There may be slight price variations in local markets. This price list is based on a NZD/EUR exchange rate of 1 NZD:0.59 EUR. Exchange rates are reviewed at the end of each month. If there is a movement greater than 5% to this rate then the price list will be updated & uploaded by working day 5 of the following month. End of month rates are obtained from <https://www.ird.govt.nz/business-income-tax/overseas-currency-convert-nz.html>

Kevlar Cover

FLAME RESISTANT COVER TO REDUCE THE RISK OF CONSEQUENTIAL FIRES




- Typically used in over pressure and potentially explosive applications.
- Designed to fit over existing connectors and can be tightened onto the BFM® spigot.

Maximum Diameter: 1,650mm
Maximum Length: 1,000mm

PHYSICAL PROPERTIES:


Material	Woven Kevlar (Aramid) fibre
Weight (±10%)	447g/m ² / 13.2oz/yd ²
Max. Operating Temp	260°C / 500°F (surge to 300°C to 572°F) (NB: Limited to max. operating temperature of connector underneath)



(*applies to inner Seeflex layer only)

Additional sizes are available up to 1,650mm diameter.

DIA:	Ø100mm		Ø125mm		Ø150mm		Ø200mm		Ø250mm		Ø300mm		Ø350mm		Ø400mm		Ø450mm		Ø500mm		Ø550mm		Ø600mm		Ø650mm	
LENGTH: (mm)	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:	Part No:	RRP EU€:
100	80044	251	80123	255	80089	259	80022	268	80068	278	80030	286	80031	289	80098	301	80099	311	80041	350	80055	354	80122	372	80077	391
150	80026	258	80124	263	80025	269																				
200							80002	288	80027	299	80003	311	80057	323	80029	335	80061	346	80004	390	80013	402	80028	418	80095	441

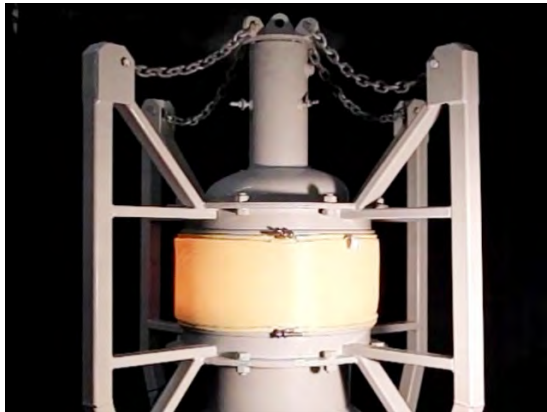

The prices shown above indicate our Recommended Retail Prices (RRP). There may be slight price variations in local markets. This price list is based on a NZD/EUR exchange rate of 1 NZD:0.59 EUR. Exchange rates are reviewed at the end of each month. If there is a movement greater than 5% to this rate then the price list will be updated & uploaded by working day 5 of the following month. End of month rates are obtained from <https://www.ird.govt.nz/business-income-tax/overseas-currency-convert-nz.html>